



**Clarification of Scope of Works
For**

RFQ48.2024 – Taylor Park Handrails and Metalwork

Date: Thursday 27 February 2025

Weddin Shire Council

In accordance with Council's Procurement Policy, any clarifications of scope of works are provided below and will be updated accordingly. It is the responsibility of suppliers to check any clarifications that may be updated on Council's website prior to their submission.

Question 1

It appears that they are a number of measurements missing from the plans on L301 to L303 to be able to complete the quote?

REPLY

Thank you for bringing this to my attention. I have spoken to sala4D and they will reissue page L-301 and L-303. I will have these added to councils website as soon as possible. I hope the re-issued pages clarify your questions.


Each ramp and stair has its length nominated, along with the landing length. The extension of the handrail at each end should be to meet AS1428.

Question 2


Thanks for the updated information.

Would you be able to have Sala4D clarify the measurements on the below as there still appears to be missing measurement data on the updated plans from yesterday.

Ramp #4 - no length measurement information on L301

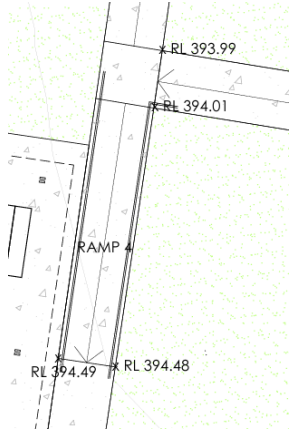

Stair #2 no length measurement information on L303

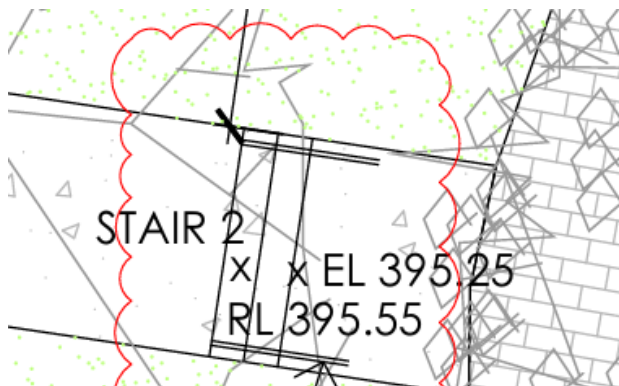

REPLY

Apologies for the delayed reply.

I have brought this to sala4D's attention and they have provided me with updated drawings with these measurements.

These new documents will be added to councils website shortly (25.02.2025).

Question 3

Also confirming the fixtures for the handrails being dyna bolted to the concrete path.

REPLY

In relation to the securing of the handrail, it's the contractor's responsibility to ensure that the handrail is fixed securely, but it could be suggested that using a masonry fixing in conjunction with a multi-purpose, polyester adhesive may be suitable.